

Fixed bollards SF


with flat ground fitting

FXSF275K12 9001200



Product description		
Fixed bollards SF	FXSF275K12 900	FXSF275K12 1200
Height	900 mm	1200 mm
Diameter	273 mm	273 mm
Material thickness	20 mm	
Material	Steel S355JR Stainless steel (AISI 304) / (AISI 316)	
Fixed cylinder	Steel version: anti-corrosion treatment – standard painting * Stainless steel version: full inox cylinder or replaceable sleeve, standard painting * or brushed	
Surface treatment	Steel version: anti-corrosion treatment – standard painting * Stainless steel version: full inox cylinder or replaceable sleeve, standard painting * or brushed	
Reflecting strips (height 55 mm)	Yes	
Fitting depth	200 mm (optional: 300 mm incl. approx. 100 mm for finished floor covering, e.g. paving stones)	
Impact energy without destruction - impact resistance	700,000 J	
Impact energy with destruction - breakout resistance	2,000,000 J	
Connecting lead for LED lighting strips (optional)	Standard 10 m (max. 80 m)	
Certified acc. to (Prerequisite: foundation consisting of at least 3 connected ground fittings)	M50, K12, PAS68, IWA14-1	

* For orders with no surcharge in RAL to choose, the standard colour is Anthracite grey.

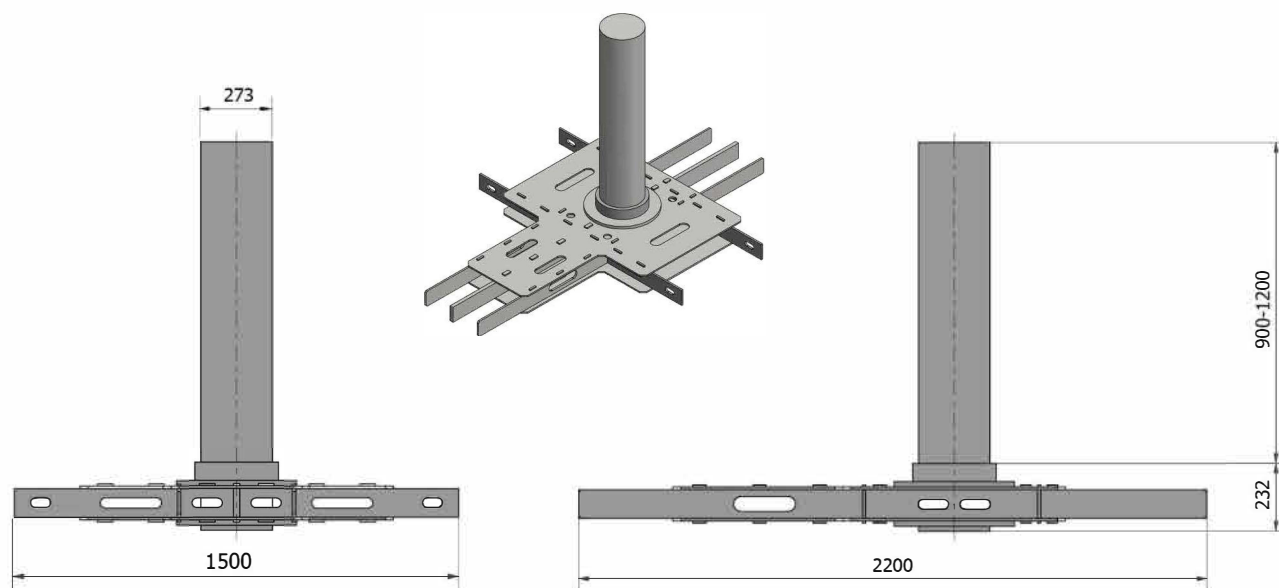

Fixed bollards SF

with flat ground fitting

FXSF275K12 9001200



Fixed bollard FXSF275K12 9001200 with flat ground fitting		FXSF275K12 900	FXSF275K12 1200
		Article no.	Article no.
Fixed bollard FXSF275K12S 9001200	Steel painted	SE426091	SE426121
	Replaceable sleeve stainless steel painted	SE429091	SE429121
	Replaceable sleeve stainless steel brushed	SE432091	SE432121
Fixed bollard FXSF275K12S 9001200 + Standard cylinder cover (head)	Steel painted	SE427091	SE427121
	Replaceable sleeve stainless steel painted	SE430091	SE430121
	Replaceable sleeve stainless steel brushed	SE433091	SE433121
	Stainless steel painted	SE407091	SE407121
	Stainless steel brushed	SE413091	SE413121
Optional extras specifically for bollard FXSF275K12 9001200 with flat ground fitting		Article no.	
Surcharge for painting in RAL to choose			AA900871
Surcharge for version in brushed stainless steel (AISI 316)	Cylinder 275-900		AA104131
	Cylinder 275-1200		AA104161
Surcharge for sleeve version in brushed stainless steel (AISI 316)	Cylinder 275-900		AA108721
	Cylinder 275-1200		AA108731
Protection against corrosion - marine treatment - (recommended for saline ambient conditions) For fixed bollards with flat ground fitting	FXSF275K12 900		AA101851
	FXSF275K12 1200		AA106851
Knurling on FXSF275K12 9001200 bollard with steel cylinder (difference)	Cylinder 275-900		AA101781
	Cylinder 275-1200		AA101811
Knurling on FXSF275K12 9001200 bollard with stainless steel cylinder (difference)	Cylinder 275-900		AA101831
	Cylinder 275-1200		AA101821
Surcharge for 100 mm higher cylinder (e.g. for the use of paving stones)	Steel painted		AA108501
	Replaceable stainless steel sleeve		AA108511
	Stainless steel		AA108521
Surcharge for lighting strips with 25 LEDs for standard cover, incl. connecting lead, 10 m	per cylinder		AA107571
LED lighting strip power supply for semi-automatic / fixed bollards (max. 8)			AA107341
Line extension for LED lighting strips (80 m max.)	Per m		AA107551
Cylinder cover (head) and reflecting strip (no logo)	difference		AA108811
Surcharge for stainless steel cylinder cover (AISI 304)			AA101911
Surface customisation of the cylinder cover, e.g. with a city crest or a logo			
Ground fitting without cylinder			AA108491
Fitting set for connecting two ground fittings for a level subsurface (4 bolts, 4 nuts and 8 washers)	Fitting set		AA108531
Surcharge for connecting two ground fittings with angle >60°	Fitting set		AA108481